



PLAIN

PLAIN



36-44%
EN ISO 14021







Recycled Content



87%
EN ISO 7742-2 & 3

Light Reflectance

PLAIN

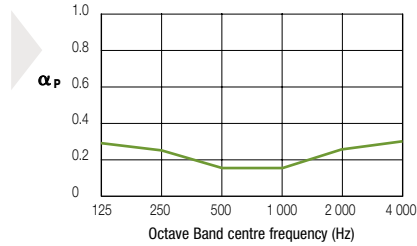
	BOARD	TEGULAR	MICROLOOK
			
	Prelude XL ² /TLX 24 mm Prelude Sixty ²	Prelude XL ² /TLX 24 mm Prelude Sixty ²	Prelude XL ² /TL 15 mm Interlude XL ² 15 mm
			
600 x 600 x 15 mm	9587 M	9589 M	9590 M
625 x 625 x 15 mm	9587 D	9589 D	9590 D
600 x 1200 x 15 mm	9588 M		
625 x 1250 x 15 mm	9588 D		



EN ISO 354 &
EN ISO 11654

α_w	NRC	125	250	500	1000	2000	4000	Hz
0.20(L)	0.20	0.30	0.25	0.15	0.15	0.25	0.30	α_p

Class = E



EN ISO 10848-2
& EN 717-1

D_{nfw}	
35 dB	



EN 13501-1

EEA Euroclass A2-s1, d0

RUS KM1 (G1, V1, D1, T1) FZ 123



EN 12667
& ISO 8301

$\lambda = 0.06$ W/m K



95 % RH



15 YEAR
guarantee



4 kg/m²



Please contact our Armstrong Technical Sales Group for further details.

www.armstrong.eu



Armstrong®

